


PowerVault

THREE-PHASE

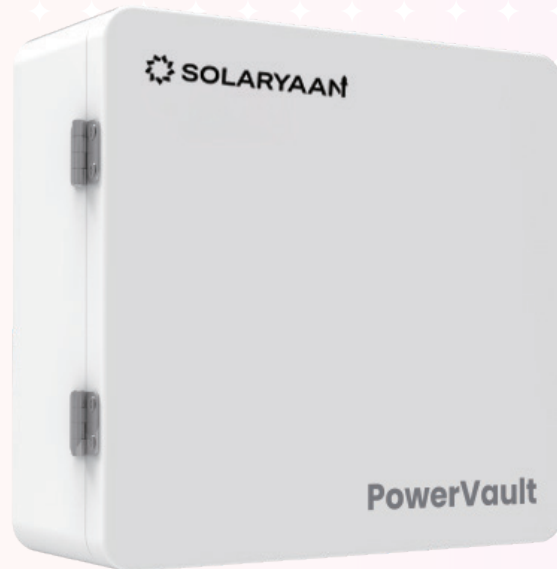

www.solaryaan.com

- Robust metal enclosure Ip65
- Applied to residential, commercial solar installations
- Compatible with SYT 5K / SYT 6K / SYT 8K / SYT 10K / SYT 12K / SYT 15K inverter
- Automatically switch to On-Grid/ Off-Grid state



Max. output current 23.9A



Safety



Ip65 Rated



Easy Installation

+91 83 3388 3388

info@solaryaan.com

www.solaryaan.com

[in](#) [f](#) [@](#)solaryaan

Solaryaan : A 1002, Times Square 2, Sindhu Bhavan Road, Thaltej, Ahmedabad, Gujarat 380054

*Feature to be upgraded in the future. (T&C Apply)

Technical Specifications



Model	PowerVault
AC OUTPUT (GRID)	
Grid Connection	Three Phase/3L/N/PE
Rated Voltage [Vac]	380/400
Rated Frequency [Hz]	50/60
AC Output Voltage Range [Vac]	342 ~ 440
AC OUTPUT (LOAD)	
Load Connection	Single Phase/L/N/PE
Rated Voltage [Vac]	230
AC Frequency [Hz]	50/60
Max. Apparent Power [VA]	5000
Max. Output Current [A]	23.9
witchover Time [s]	<3
AC INPUT (INVERTER)	
Rated Voltage [Vac]	380/400
AC Frequency [Hz]	50/60
Compatible Inverter	SYT 5K / SYT 6K / SYT 8K / SYT 10K / SYT 12K / SYT 15K
GENERAL SPECIFICATION	
Cooling Concept	Natural
Installation	Wall-mounted
Operating Temperature Range [°C]	-25 ~ +45
Relative Humidity Range [%RH]	0 ~ 100
Dimensions (W*H*D) [mm]	449*365*140
Net Weight [kg]	8.5
Ingress Protection	IP65
Com	Dry contact point(DO)
Warranty	10 Years